



# GR 16 S

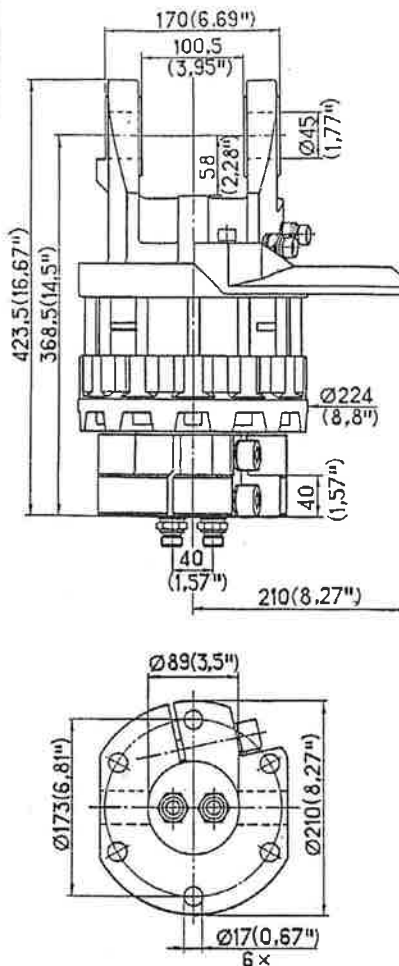

A-9063 Maria Saal  
 Kranstraße 1  
 Tel. 04223/30430-0  
 Fax: 04223/30430-15  
 www.kogler-krantechnik.at

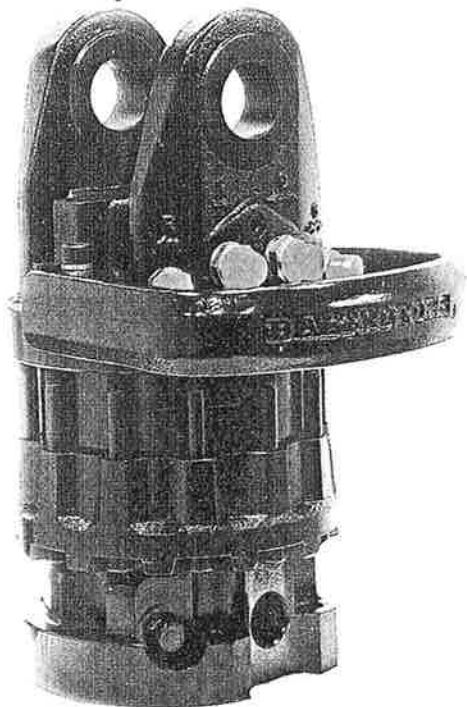

## TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / TEKNISKA DATA / TEKNISET TIEDOT

Rotation / Drehung / Rotation / Rotaatio	Unlimited / Unbegrenzt / Obegränsad / Rajoittamaton	
Maximal axial load static, kg Max. Axialbelastung statisch, kg Maximal axiell last statisk, kg Maks. aksiaalinen kuormitus staattinen, kg	16000	
Maximal axial load dynamic, kg Max. Axialbelastung dynamisch, kg Maximal axiell last dynamisk, kg Maks. aksiaalinen kuormitus dynaaminen, kg	8000	
Torque momentum at 25 MPa (250 bar), Nm Drehmoment bei 25 MPa (250 bar), Nm Vridmoment vid 25 MPa (250 bar), Nm Vääntömomentti 25 MPa (250 bar), Nm	3400 Nm (340 kgm)	
Rate of fluid flow, l/min Erforderlicher Ölfluß, l/min Rek. oljeflöde, l/min Öljynvirtaussuositus, l/min	40 l/min	
Maximal pressure, MPa Max. Betriebsdruck, MPa Maximalt tryck, MPa Maks. käyttöpaine, MPa	Rotator ⇄R⇄ 25 MPa (250 bar) Grapple ⇄G⇄ 30 MPa (300 bar) Grapple ⇄G⇄ 30 MPa (300 bar)	Connection / Verbindung / Anslutning / Liitin / BSP 1/2" BSP 1/2" BSP 1/2"